

Cost savings, Quality and Simplicity are three key factors with the new **Crane Deck** loading platforms. The clever innovative design of our system enables quick trouble free installation across a broad range of construction applications. Crane Decks will greatly reduce any risk factors and safety concerns compared with other products on the market.

This superb system will save both time and money without compromise, and will contribute to the smooth and trouble free running of your project.

Solely manufactured from the best quality materials, our revolutionary new system offers the following features:

- Rear rollers for ease of install
- Harness anchor points
- Safe work load of 5 tonnes
- Vastly reduced overall costs on comparable products










	4500mm Outboard	4750mm Outboard	5000mm Outboard	5250mm Outboard
SWL-UDL (kg) 5000	4000	3200	2500
RA (t)	7.6	6.7	6	5.4
RB (t)	3.7	3.3	3	2.7
RC	0.0	0.0	0.0	0.0

Reaction on each side of the platform. Assumed load always centre both ways on the outboard of the platform. All loads are static loads. No load factors applied

Horizontal force not taken into account.

Reactions provided based on rigid supports i.e. effects on deflections of supporting slabs not factored into design.

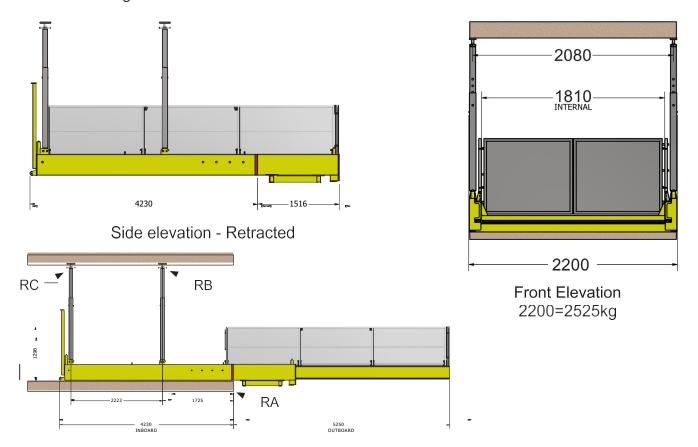

Side Elevation - Fully Extended



	4500mm Outboard	4750mm Outboard	5000mm Outboard	5250mm Outboard
SWL-UDL	(kg) 5000	4000	3200	2500
RA (t)	7.6	6.7	6	5.4
RB (t)	3.7	3.3	3	2.7
RC	0.0	0.0	0.0	0.0

Reaction on each side of the platform. Assumed load always centre both ways on the outboard of the platform. All loads are static loads. No load factors applied

Horizontal force not taken into account.

Reactions provided based on rigid supports i.e. effects on deflections of supporting slabs not factored into design.







	4500mm Outboard	4750mm Outboard	5000mm Outboard	5250mm Outboard
SWL-UDL	(kg) 5000	4000	3200	2500
RA (t)	7.6	6.7	6	5.4
RB (t)	3.7	3.3	3	2.7
RC	0.0	0.0	0.0	0.0

Reaction on each side of the platform. Assumed load always centre both ways on the outboard of the platform. All loads are static loads. No load factors applied

Horizontal force not taken into account. Reactions provided based on rigid supports i.e. effects on deflections of supporting slabs not factored into design.



Side elevation - Retracted

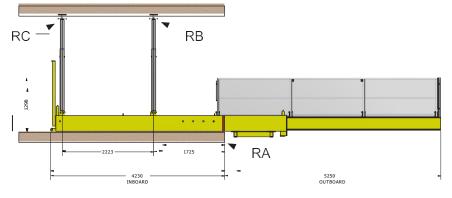




3080

2810 INTERNAL

Side Elevation - Fully Extended

CRANE DECK TRANSPORTATION

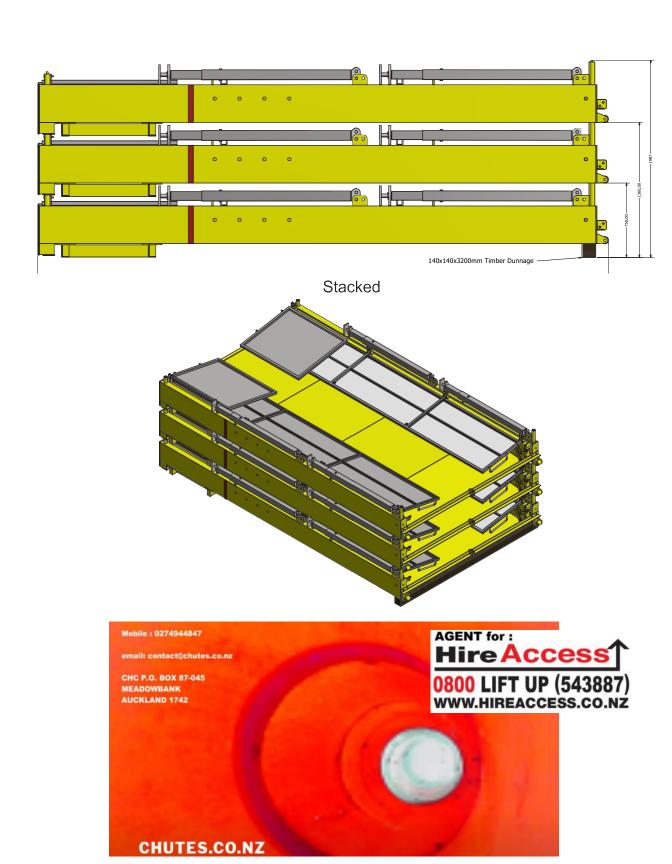

To discuss your requirements, and realise the benefits of the Crane Deck System Contact Us on <u>0274 944 847</u> For More Information

All information stated on this specification sheet comes from relevant professional engineers engaged for the purpose of compliance with appropriate regulations. Crane Deck believes that all information stated on this specification sheet to be true and correct at the time of printing. Crane Deck accepts no responsibility for its accuracy and recommends pursuing your own sources for confirmation of stated details. Contact Crane Deck directly for any further information regarding this product. All loads are static loads i.e. no load factors applied. Horizontal forces are not taken into account.